Glass/Glass Frameless





Self-cleaning effect



Extreme load resistance



Fire class A



Salt mist resistance



Ammonia resistance



Dust and sand resistance



Positive sorting up to +5W

Front side \$\gamma\$ 355 W

30 Year product warranty

87 % Power guarantee

30 Year efficiency guarantee

60 cell

MC4 compatible


Frameless Glass/Glass


| Electrical data (STC*) | |
|--|--|
| Maximum power | 355 |
| Cell technology | Bifacial |
| Open circuit voltage (V _{oc} /V) Short circuit current (I _{sc} /A) Max power voltage (Vmpp/V) Max power current (Impp/A) Module efficiency (n) | 39,95 11,09 34,03 10,45 19,11% |
| Max system voltage (V) | 1500 |
| Max current (A) | 20 |
| Power tolerance | 0/+5W |

*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM 1.5 and cell temperature of 25°C. Flash testing measurment accuracy of \pm 1/-5% All transparency values are approximate +/-3%.

| Additional power gain | 5% | 10% | 20% | 25% |
|-------------------------|-----|-----|-----|-----|
| Total module power (Wp) | 372 | 390 | 426 | 444 |

Dimensions & Mounting

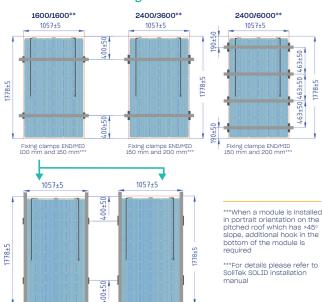

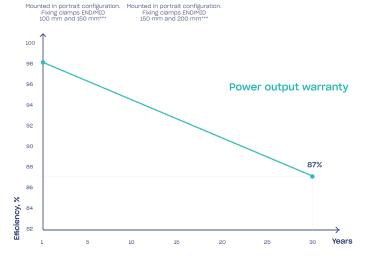

| Temperature ratings | |
|--|--|
| Current temperature coefficient (α) Voltage temperature coefficient (β) Power temperature coefficient (δ) Nominal operating module temperature | +0.04% / °C -0.35% / °C -0.47% / °C 46 °C |
| Mechanical data | |
| Dimensions (LxWxH) (mm) Dimensions with edge sealing (LxWxH) (mm) Weight (kg) Front / Back glass (mm) Cell Type Cell Size (mm) Busbars Transparency % Cell configuration Frame Operating temperature (°C) Design load (wind/snow) (Pa) Maximum test load (wind/snow) (Pa) Junction box / IP class Cable cross section size (mm²) | 1770x1049x7,1 1778±5x1057±5x7,1 30 3 Bifacial 166x166 9 10 6x10 Frameless -40 ÷ +85 2400/6000** 3600/9000 Split junction box / IP68 |
| Cable length Bypass diodes | 1,2 m 3 |

Connector **Safety factor 1.5

Attention

- · Always check if your system is compatible with local environmental conditions (wind / snow load, temperatures) on your site to ensure safety and long-term energy production.
- \cdot Do not connect differently orientated PV panels in the same string / MPPT of the inverter (unless optimizers are used).
- · Do not connect strings with an unequal amount of PV panels in one MPPT (unless optimizers are used).
- · Use PV panels of same electrical parameters in one string/MPPT (unless optimizers are used).
- · Always ensure that your inverter is equipped with DC disconnector. If not it is recommended to install it externally.
- · Never let different metals come in contact with each other. Use bi-metallic plates or plastic separators to eliminate galvanic corrosion.
- · It is highly recommended to install SPD's in both AC and DC circuits because overvoltages void the warranty for inverters and also panels if they are harmed. · It is highly recommended to ground PV panels mounting system and to install
- lightning protection in site.
- · If the mounting rails are installed across the module, bifaciality effect will be lower due to cells shading.

Tips for better power output

- · Better module ventilation and shorter connection cables increase electrical energy production.
- · Always observe object/mutual shading in site. Shading can drastically cut electrical energy generation output.
- · Increase PV panel height from the ground so that more light can travel beneath the module and then reflect.
- · The Albedo value increases significantly if the modules are installed above white, lightreflecting surfaces.



















